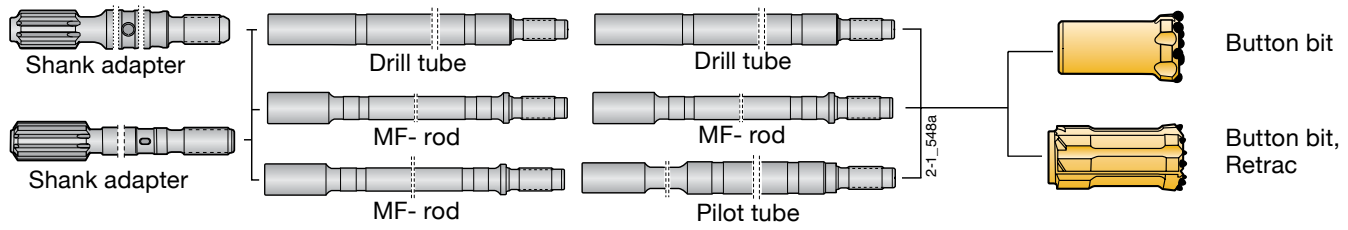






# Bench drilling

## Sandvik GT60





	Flushinghole, mm		Buttons, mm			Dimensions		Bit classification	Part No.
	Front No	Gauge Size	Front No	Gauge Size	Angle	D mm	in		





### Button bit, Flat Face, Heavy Duty

		4x11	—	6x12	8x14	35°	92	3 5/8"	HMSCVA	7620-1892-S48
		4x11	—	6x12	8x14	35°	96	3 3/4"	HMSCVA	7620-1896-S48
		3x14	—	9x11	9x13	35°	102	4"	HMSCVA	7620-1902-S48
		3x14	—	10x12	9x14	40°	115	4 1/2"	MSCAN	7620-1915-R48
		3x14	—	10x12	9x14	35°	115	4 1/2"	HMSCVA	7620-1915-S48
		3x14	—	10x13	9x14	35°	127	5"	HMSCVA	7620-1927-S48
		3x14	—	10x14	9x16	35°	140	5 1/2"	HMSCVA	7620-1940-S48
		3x14	—	12x14	9x16	35°	152	6"	HMSCVA	7920-1952-S48

### Button bit, Retrac

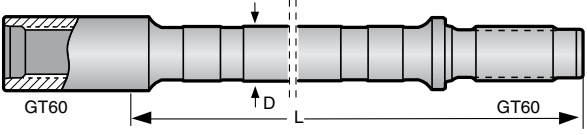
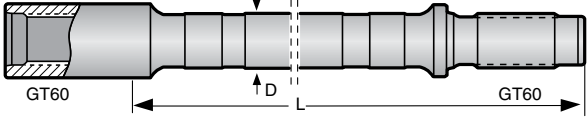
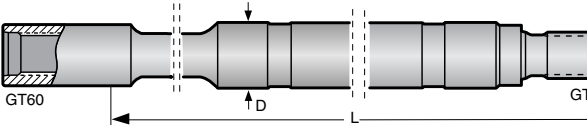

		2x14	—	9x12	9x12	40°	92	3 5/8"	MSCFAN	7620-8792-R48
		2x14	—	9x12	9x12	40°	96	3 3/4"	MSCFAN	7620-8796-R48
		2x14	—	10x12	9x13	40°	102	4"	MSCFAN	7620-8702-R48

### Button bit, Retrac, Flat Face

		3x14	—	9x11	9x13	35°	102	4"	HMSCFVA	7620-4902-S48
		3x14	—	10x12	9x14	40°	115	4 1/2"	MSCFAN	7620-4915-R48
		3x14	—	10x12	9x14	35°	115	4 1/2"	HMSCFVA	7620-4915-S48
		3x14	—	10x13	9x14	35°	127	5"	HMSCFVA	7620-4927-S48
		3x14	—	10x14	9x16	35°	140	5 1/2"	HMSCFVA	7620-4940-S48
		3x14	—	12x14	9x16	35°	152	6"	HMSCFVA	7620-4952-S48
		3x13	—	6x13	9x16	35°	118	4 5/8"	HMCFVA	7620-8118-S48

# Bench drilling

## Sandvik GT60

	Dimensions			D		Part No.
	L			mm	in	
	mm	ft	in			
MF-rod, GT60 - Round 60 (64) - GT60. For bits from 96 mm.						
	3660	12'	-	60	2 3/8"	7610-1137-70
	4265	14'	-	60	2 3/8"	7610-1143-70
	6095	20'	-	60	2 3/8"	7610-1161-70
	4265	14'	-	64	2 1/2"	7610-1243-70
Flushing hole Ø 22.5 mm. Female end OD 85 mm.						
MF-rod, GT60 - Round 60 - GT60. For 92-115 mm bits.						
	4265	14'	-	60	2 3/8"	7610-1443-70
Flushing hole Ø 22.6 mm. Female end OD 82 mm.						
Pilot Tube						
	1600	5'	3"	87	3 1/2"	7640-8716-70
	4265	14'	-	87	3 1/2"	7640-8743-70
	5335	17'	6"	76	3"	7640-7653-70
Female end OD 85 mm (82 mm on 76 mm tubes)						
Drill Tube						
	4265	14'	-	87	3 1/2"	7600-8743-71
Always use with Tube shank adapter 7600-6030-01 (HL1500) or 7600-6031-01 (HL1000)						